


ComAnt[®] Communications Antennas



FREQUENCY INDEPENDENT DATA

Description: vehicular antenna
 Frequency: 221-239 MHz, 336-364 MHz, 370-390 MHz, 380-400 MHz, 405-440 MHz, 440-475 MHz, 791-862 MHz, 830-890 MHz, 880-960 MHz, 2300-2500 MHz, 5150-5725 MHz
 Impedance: 50 ohm
 Gain: 2 dBi
 H -3 dB: 81°
 E -3 dB: 0 dB
 F/B: 0 dB
 Polarization: vertical
 Connector: N-female
 VSWR: < 1.5
 Radome: UV resistant FG, white / PP, black
 PU foam filling
 Radiator: copper
 Attachment: 4 pcs M5x20 stainless steel bolts and self-locking nuts, closed cell PE foam gasket
 Temperature: -40°C - +80°C
 IP: 67

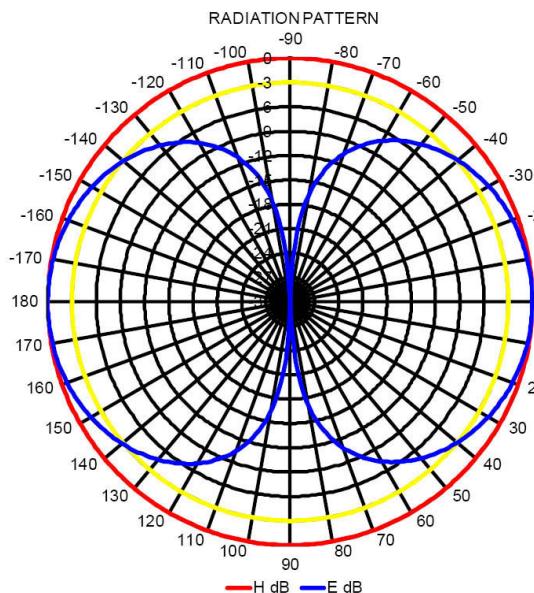

- combination of durability, light weight and low wind load
- radome enclosed radiator
- IP67 proof construction
- all electromechanics moulded inside of closed cell PU foam
- UV protected glass fibre radome
- DC grounded feed point
- optimized impedance match with reduced size ground plane
- improved bandwidth



AdriNet d.o.o.
 Jarušćica 9a
 10000 Zagreb
 Croatia
 p. +385 1 888 6884
 f. +385 1 8001 151
 adrinet@adrinet.hr
 www.adrinet.hr



RoHS
 Compliant

CompleTech
 ComAnt[®]-antennas by CompleTech, Finland

CAV VEHICULAR ANTENNA